

Pall Ultipleat® SRT Filtration Products

High Pressure Series



Return Line Series



In-Tank Series



Multi-element Series



Ultipleat SRT Filter Housings

Series	Flows to	Pressures to [†]	Length*
High Pressure	UH209	110 lpm (30 USgpm)	350 bar (5,075 psi) 3, 7
	UH219 ¹	230 lpm (60 USgpm)	420 bar (6,100 psi) 4, 8, 13, 20
	UH239	350 lpm (90 USgpm)	420 bar (6,100 psi) 13, 20
	UH319 ¹	600 lpm (160 USgpm)	420 bar (6,100 psi) 8, 13, 20, 40
	UP319	600 lpm (160 USgpm)	250 bar (3,625 psi) 8, 13, 20, 40
Return Line	UR209	120 lpm (32 USgpm)	41 bar (600 psi) 3, 7
	UR219	265 lpm (70 USgpm)	41 bar (600 psi) 4, 8, 13, 20
	UR319	760 lpm (200 USgpm)	41 bar (600 psi) 8, 13, 20, 40
	UR329	600 lpm (160 USgpm)	28 bar (400 psi) 20, 40
	UR619	835 lpm (220 USgpm)	28 bar (400 psi) 20, 40
	UR629	1,050 lpm (280 USgpm)	28 bar (400 psi) 20, 40
	UR649	1,500 lpm (400 USgpm)	28 bar (400 psi) 20, 40
In Tank	UR699	835 lpm (220 USgpm)	28 bar (400 psi) 20, 40
	UT279	265 lpm (70 USgpm)	10 bar (150 psi) 4, 8, 13, 20
	UT319	760 lpm (200 USgpm)	10 bar (150 psi) 8, 13, 20, 40

SRT Multi-element Filter Housings (simplex & duplex)

Series	Flows to	Pressures to [†]	Length*
UFV03	1,500 lpm (400 USgpm)	10 bar (150 psi)	40
UFV05	2,500 lpm (660 USgpm)	10 bar (150 psi)	40
UFV10	4,500 lpm (1,200 USgpm)	10 bar (150 psi)	40

[†] see datasheets for fatigue pressure ratings

* nominal lengths available (inches)

¹ manifold mount port option also available

Pall Ultipleat® SRT Filtration Products


Dirt Fuse Non-bypass Series



UH231

UH311

Ultipleat SRT Filter Element

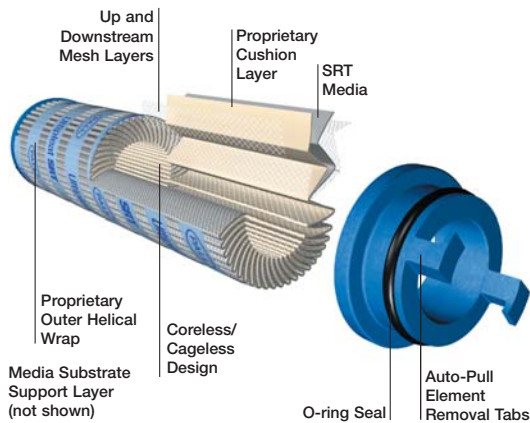

SRT 'Dirt Fuse' Filter Housings

Series	Flows to	Pressures to†	Length*
UH201	110 lpm (30 USgpm)	350 bar (5,075 psi)	3, 7
UH211 ¹	230 lpm (60 USgpm)	420 bar (6,100 psi)	8, 13, 20
UH231	300 lpm (80 USgpm)	420 bar (6,100 psi)	13,20
UH311 ¹	700 lpm (185 USgpm)	420 bar (6,100 psi)	10, 20, 40

Ultipleat SRT Filter Elements

For use in Ultipleat SRT filters fitted with a bypass valve.
Filter element burst pressure 10 bard (150 psid)

Series	Flows to	Length*
UE209	130 lpm (34 USgpm)	3, 7
UE219 / UE299	285 lpm (75 USgpm)	4, 8, 13, 20
UE319	760 lpm (200 USgpm)	8, 13, 20, 40
UE619	1,135 lpm (300 USgpm)	20, 40

SRT Dirt-Fuse Filter Elements

For use in SRT Dirt-fuse filters with no by-pass valve.
Filter element burst pressure 210 bard (3,045 psid)

Series	Flows to	Length*
UE201	125 lpm (33 USgpm)	3, 7
UE211	300 lpm (80 USgpm)	13, 20
UE311	760 lpm (200 USgpm)	10, 20, 40

† see datasheets for fatigue pressure ratings

* nominal lengths available (inches)

¹ manifold mount port option also available

Pall Industrial Manufacturing

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 888 333 7255 toll free US

Portsmouth-UK
+44 (0)23 9230 3303 telephone
+44 (0)23 9230 2507 fax

Visit us on the Web at www.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid. Products in this document may be covered by one or more of the following patent numbers: EP 667,800; EP 982,061; EP 1,380,331; EP 1 656 193; US 5,543,047; US 5,690,765; US 5,725,784; US 6,113,784; US 7,083,564; US 7,318,800.

© Copyright 2010, Pall Corporation. Pall,  and Ultipleat are trademarks of Pall Corporation. ® Indicates a trademark registered in the USA. Filtration. Separation. Solution.SM is a service mark of Pall Corporation.